

TONKAFLO® Pumps SERIES AS30000


FLOW RANGE-120 TO 380 GPM HEAD RANGE - 40 TO 420 PSI

STAINLESS STEEL STAGED PUMP PERFORMANCE CURVES - 3565 RPM

CUSTOMER _____

60 Hz

MODEL _____

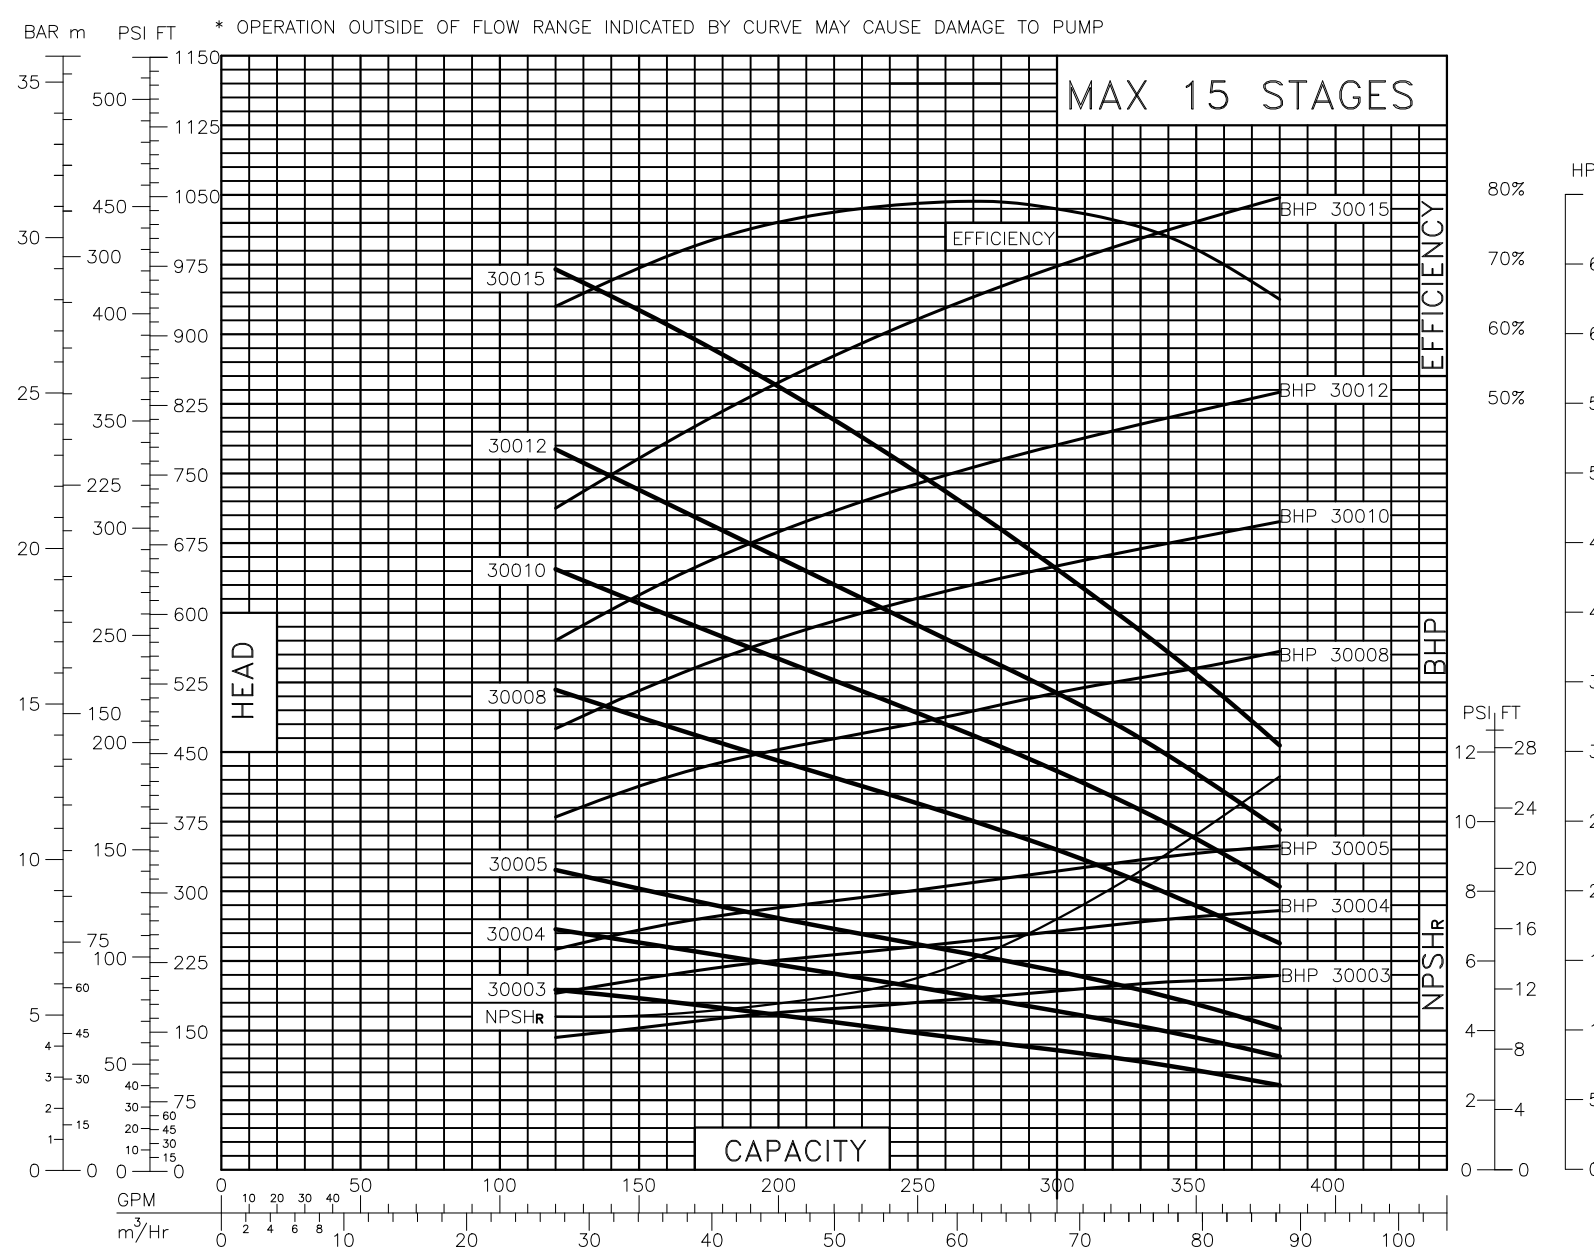

NOTES:

1. BHP CURVES INDICATE HP REQUIREMENT AT THE PUMP SHAFT WHICH INCLUDES BEARING FRAME.
MOTOR HP = BHP/MOTOR EFFICIENCY.
2. DO NOT APPLY SERVICE FACTOR FOR SIZING THE MOTOR. FOR EXAMPLE, IF MOTOR HP CALCULATES TO 31.5 THE MOTOR SELECTION SHOULD BE 40 HP.
3. FOR SIZES OTHER THAN THE STANDARD PUBLISHED, PLEASE CONSULT FACTORY.
4. OPERATING ABOVE OR BELOW THE SPECIFIED RANGE COULD DAMAGE THE PUMP.

P/N 3113920 Rev B



5951 Clearwater Drive Minnetonka, MN 55343-8995 USA • Phone 1-866-439-2837 • Fax 952-988-6060
• <http://www.watertechnologies.com>

B	SUEZ REBRANDING	131562	MS	MS	MS	19 Oct 18
A	INITIAL RELEASE	15824	-	-	-	-
REV	DESCRIPTION	ECO	DWN	APPR	APPR	DATE

TOLERANCES UNLESS NOTED	
DECIMALS	ANGLES
.X	FRAC
.XX	
.XXX	



CUSTOMER INFORMATION

TONKAFLO

DWG,TF,PRFM CURVES,30000,

4 INL,60 HZ

DRAWING NUMBER

1313095

REVISION

B

REF.:-	DOC. OWNER:-
PROJECT NO.	PART/MATERIAL NO.
	3113920
SCALE	SIZE
NONE	C
SHEET	1 OF 1